





Kiln Drive System Accessories

AMI provide various of spare parts and accessories for drive system on the roller kiln, including roller springs, roller sockets, roller spring slice, bearing seat, chain, bevel/umbrella gear, reducer and variator, valve and etc.

- Spring Leaf for Roller Socket

Spring Leaf is produced by advanced technique through process of punch, forge and press, and heat treatment. Specification: thickness 0.5—4mm, Material: 50#-85# 65Mn.

Type: 1) General 2) Defend 3) Enhance 4) Special 5) Butterfly

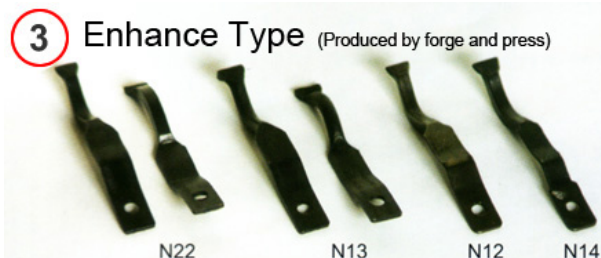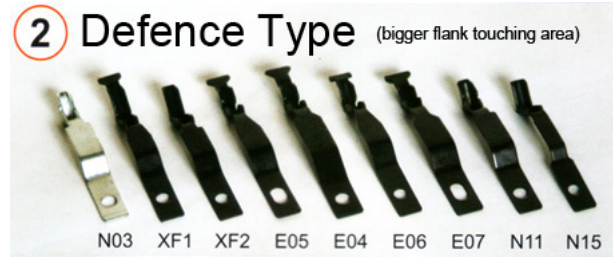

- Roller Spring

1) Round wire Spring: produced from high quality steel wire through advanced equipment and technique. With good case-hardened effect, Slide-prevented,



high temperature resistance, wear resistance, good elasticity, long working life.

2) Square wire Spring: Besides the same advantages of round wire, it have bigger contact area which make it with longer working life, reduce the random ambulation and libration, much effectively protect the running of the roller and drive system, and make the tiles moving stable and evenly.

Specificaliton: $\Phi 20-80\text{mm}$, wire size: 1.5—2.5mm

Material: 65[#]-85[#] 65Mn spring steel



3) Wide-body Spring


Specificaliton: $\Phi 39 \times 95\text{mm}$, $\Phi 39 \times 60\text{mm}$

Thickness: 1.2-1.5mm


Material: 65Mn Spring steel



- Roller Socket

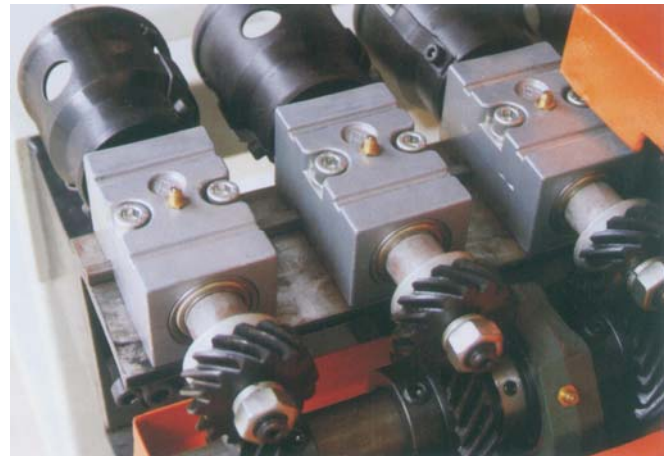

- Bearing Seat special for Roller Kiln

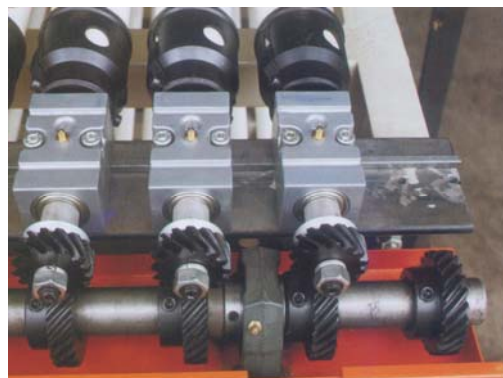

Customers are recommended to use reverse key single hole bearing seat, which combine the advantages of rank-hole bearing seat and single hole bearing seat. Good Fixity and easily repaired.

• Special Shaft Coupling

Customers are recommended to use Semicircle Shaft Coupling (working life: 7-10years), much better than Spline Shaft Coupling (2-3 years) and Flat Key Shaft Coupling (1-2 years).




• Suspending Slice and Hook for Suspended Ceiling Birck

1) Suspending Slice

Specification: 100x130mm—150x165mm Thickness:1.2—1.5mm

Material: 304# 321# 201# Stainless Steel

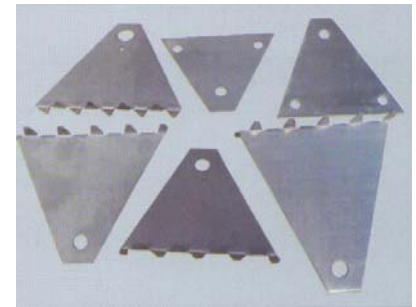

2) Suspending Hook

Specification: Length 100—400mm,

Hook 45—55mm

Mateiral: Iron, Stainless Steel



• Reducer and variator

Various of Stepless Reducer, Worm Reduce, Cycloidal-pin Gear Speed Reducer, Helical Gear-Bevel Gear Reducer.

<p>JWB-XB-190F系列无级变速器 JWB-XB-190F SERIES VARIATOR 输入功率: 0.12-200KW 减 速 比: 4.22-22323 输出扭矩: 可达18000N·m</p>	<p>RV系列蜗轮蜗杆减速器 RV SERIES WORM REDUCER 输入功率: 0.06-7.5KW 减 速 比: 5-100 双级传动比最大可达1000 输出扭矩: 可达1179N·m 特 点: 蜗轮材料采用独特的华南理工大学专利产品—KK合金, 具有超群的高效率和长寿命。</p>	<p>BWD系列摆线针轮减速机 BWD SERIES CYCLOIDAL LANTERN REDUCER 输入功率: 0.25-30KW 减速比: 9-87 双级传动可达7569 输出扭矩: 可达8000N·m 特点: 超强的过载性能, 应用范围极其广泛。</p>	<p>S系列斜齿轮-蜗杆减速机 S SERIES HELICAL-WORM REDUCER 输入功率: 0.12-22KW 减速比: 6.8-11267 输出扭矩: 可达4200N·m</p>

- Others: Special Gear, Aluminium Air Pipe, Butterfly Valve, Relief Valve

Special Gear



Aluminium Air Pipe



Butterfly Valve



Relief Valve



Welcome to contact us for more details.

AMI Enterprises

Tel.: 0086 757 83030798 Fax: 82701478

E-mail: info@amic.biz sales@amic.biz